


ERMES ATS


ATS TECHNICAL DATA SHEET

MODEL		ERMES 16A	ERMES 32A	ERMES 32A BP
SIZE (A)		16	32	32
INPUT	Rated voltage	200/208/220/230/240 Vac (±5%/10%/15%/20%)		200/208/220/230/240 Vac (±5%/10%/15%/20%)
	Frequency	50/60 Hz (±5%/10%/15%/20%)		
	Input sockets	2 x IEC-C20	2 x 30 A terminal blocks	2 x 30 A terminal blocks
OUTPUT	Rated voltage	200/208/220/230/240 Vac		200/208/220/230/240 Vac
	Maximum output current	16	32	32
	Transfer time	8–12 ms		
	Output sockets	8 x IEC-C13 1 x IEC-C19	12 x IEC C13, 2 x IEC C19 1 x 32 A terminal blocks	12 x IEC C13, 2 x IEC C19
CONNECTIVITY	Built-in communication ports	RS232, USB, EPO, relay card with dry contacts (5 out)		
	User interface	LED (source A and/or B, fault status) LCD (parameters: alarms, faults)		
	Optional accessories	RS485, SNMP/Web cards		
GENERAL	Dimensions (WxDxH) mm	440x275x44	440x275x88	440x346x88
	Weight (kg)	4	6	8
	Protection	Downstream short circuit		
ENVIRONMENTAL PARAMETERS	Operating temperature	-5°C to + 40°C (0%–90% non-condensing)		
REGULATIONS	Standards	IEC EN 62368-1, IEC EN 62310-2		
	Marking	CE, UKCA		

ERMES 16A



ERMES 32A

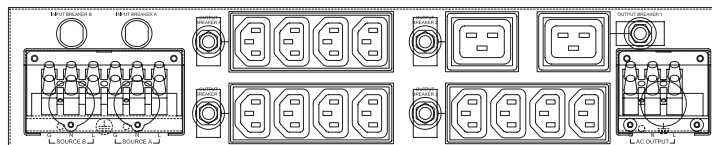

ERMES 32A BP

