



Taurus
10-80 kVA



TAURUS

TAURUS 10-80 kVA

State-of-the-art technology for a high performance three-phase UPS


Its power factor of 1 (kW = kVA) and easy maintenance reduce system TCO, making Taurus the best choice for data centres.




Applications

- Data centres
- Electromedical equipment
- Industrial applications
- Regenerative loads (lifts, cranes, numerically controlled machines, etc.)


TAURUS
10/20 kVA

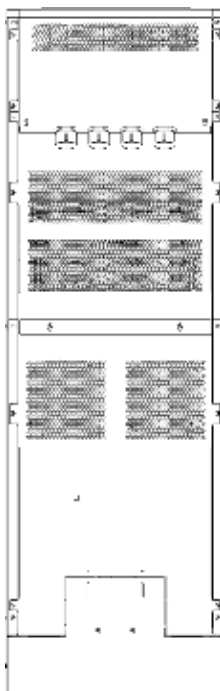

TAURUS
30/40 kVA

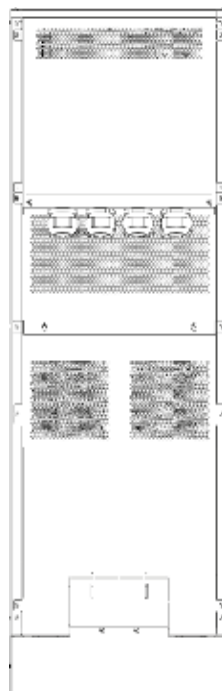

TAURUS
60/80 kVA

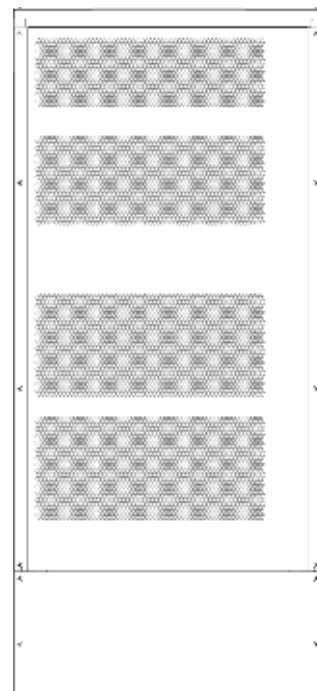

TAURUS

TAURUS TECHNICAL DATA SHEET

MODEL		TAURUS 10kVA	TAURUS 20kVA	TAURUS 30kVA	TAURUS 40kVA	TAURUS 60kVA	TAURUS 80kVA
POWER	KVA	10	20	30	40	60	80
	KW	10	20	30	40	60	80
INPUT	Rated voltage	380/400/415 Vac three-phase with neutral					
	Voltage tolerance	±20%					
	Rated frequency	40 – 70 Hz					
	Power factor	≥0.99					
	Current distortion (THDi)	<3%					
OUTPUT	Rated voltage	380/400/415 V three-phase with neutral					
	Voltage stability	±1% (static load)					
	Frequency	50/60 Hz					
	Frequency stability	±0.01% (free running)					
	Power factor	1					
	Crest factor	3:1					
	Voltage distortion	<1% with linear load, <3% with distorting load					
BATTERY	Permissible overload	110% for 60 minutes, 125% for 10 minutes, 150% for 1 minute, >150% and <300 for 3 seconds					
	Number per string (batt 12V)	26 – 40 conf.	32 – 40 configurable				
	Max charging current *	10 A	21 A	30 A	39 A	60 A	78 A
	Common battery for parallel configuration	Supported					
	Internal battery (optional)	Up to 80 12 V 7/9 Ah battery blocks					N.A.
EFFICIENCY	VFI mode	Up to 96%					
	ECO mode	Up to 98%					
BYPASS	Rated voltage	380/400/415 V three-phase + neutral					
	Voltage tolerance	±5% – ±25% (programmable alarm)					
	Frequency	50/60 Hz					
	Frequency tolerance	±1 Hz/±3 Hz (selectable)					
GENERAL	Dimensions (WxDxH) mm	440x860x1390				600x827x1300	
	Weight (kg)	84	86	130	132	200	210
	Protection class	IP20					
	Cold start from the battery without mains power	Included			Optional		
	Parallel connection	Up to 6 units					
CONNECTIVITY	User interface	4.3 " colour LCD touch screen display with removable SD card					
	Built-in communication ports	USB, RS232, EPO, 1 in/3 out dry relay contacts (programmable) and additional slots for optional cards					
	Optional accessories	Cards: SNMP, RS485, ModBus, 6 in/6 out dry relay contacts (programmable), touch panel for remote monitoring of up to 64 units					
ENVIRONMENTAL PARAMETERS	Operating temperature**	0 – 40°C					
	Relative humidity	0 – 95% (without condensing)					
	Altitude (a.s.l.)	<1000 m with no power derating, >1000 m with 0.5% derating for every 100 m.					
	Audible noise at 1 m.	<52 dBA		<55 dBA		<60 dBA	
REGULATIONS	Standards	IEC EN 62040-1, IEC EN 62040-2, IEC EN 62040-3					
	Marking	CE, UKCA					

* Subject to conditions ** To be verified according to the battery parameters



**Versatile high-power
technology for critical applications**



Kronos Plus
10-40 kVA



Kronos Plus XL
10-40 kVA



Taurus
10-80 kVA



Titan
100-500 kVA



Titan GT
100-800 kVA



Rev.2024/06 - Our commitment to continuous innovation means that catalogue data may be subject to change without notice

AblereX Electronics Italy srl

Viale Milanofiori · Strada 6 · Palazzo N1
20089 Rozzano (MI)
info@ablerex.eu · Tel. +39 02 36696420
www.ablerex.eu

AblereX Electronics Ltd

19 The Circle Queen Elizabeth Street,
London, Greater London SE1 2JE - UK
info@ablerex.uk · Ph. +44 (0) 7920 058834
www.ablerex.uk